



Wkręt do drewna
z łbem sześciokątnym

DIN 571

PN/M-82501

Materiał: stal, A2

Powłoka ochronna: ocynk

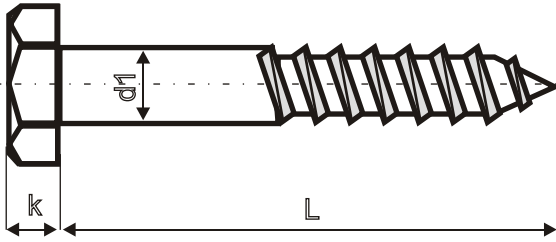

d1	4	5	6	7	8	10	12	16
k	2,8	3,5	4	5	5,5	7	8	10
s	7	8	10	12	13	17	19	24
e min.	7,5	8,63	10,89	13,07	14,2	18,72	20,88	26,17

d1 mm	L mm	stal ocynkowana	A2
		057152	057120
4	20,0	040-020	040-020
	25,0	040-025	040-025
	30,0	040-030	040-030
	35,0	040-035	040-035
	40,0	040-040	040-040
5	20,0	050-020	050-020
	25,0	050-025	050-025
	30,0	050-030	050-030
	35,0	050-035	050-035
	40,0	050-040	050-040
	45,0	050-045	050-045
	50,0	050-050	050-050
	60,0	050-060	050-060
6	20,0	060-020	
	25,0	060-025	060-025
	30,0	060-030	060-030
	35,0	060-035	060-035
	40,0	060-040	060-040
	45,0	060-045	060-045
	50,0	060-050	060-050
	60,0	060-060	060-060
	70,0	060-070	060-070
	80,0	060-080	060-080
	90,0	060-090	060-090
	100,0	060-100	060-100
	120,0	060-120	060-120
7	30,0	070-030	
	35,0	070-035	
	40,0	070-040	070-040

d1 mm	L mm	stal ocynkowana	A2
		057152	057120
7	45,0	070-045	070-045
	50,0	070-050	070-050
	60,0	070-060	070-060
	70,0	070-070	070-070
	80,0	070-080	070-080
	90,0	070-090	070-090
	100,0	070-100	070-100
8	25,0	080-025	080-025
	30,0	080-030	080-030
	35,0	080-035	080-035
	40,0	080-040	080-040
	45,0	080-045	080-045
	50,0	080-050	080-050
	60,0	080-060	080-060
	70,0	080-070	080-070
	80,0	080-080	080-080
	90,0	080-090	080-090
	100,0	080-100	080-100
	110,0	080-110	080-110
	120,0	080-120	080-120
	130,0	080-130	080-130
	140,0	080-140	080-140
	150,0	080-150	080-150
	160,0	080-160	080-160
	180,0	080-180	080-180
	200,0	080-200	080-200
		220,0	080-220
	240,0	080-240	
	260,0	080-260	

d1 mm	L mm	stal ocynkowana 057152	A2 057120
10	40,0	100-040	100-040
	50,0	100-050	100-050
	60,0	100-060	100-060
	70,0	100-070	100-070
	80,0	100-080	100-080
	90,0	100-090	100-090
	100,0	100-100	100-100
	110,0	100-110	100-110
	120,0	100-120	100-120
	130,0	100-130	100-130
	140,0	100-140	100-140
	150,0	100-150	100-150
	160,0	100-160	100-160
	180,0	100-180	100-180
	200,0	100-200	100-200
	220,0	100-220	
	240,0	100-240	
	260,0	100-260	
280,0	100-280		
300,0	100-300		
12	50,0	120-050	120-050
	60,0	120-060	120-060
	70,0	120-070	120-070
	80,0	120-080	120-080
	90,0	120-090	120-090
	100,0	120-100	120-100
	110,0	120-110	120-110

d1 mm	L mm	stal ocynkowana 057152	A2 057120
12	120,0	120-120	120-120
	130,0	120-130	120-130
	140,0	120-140	120-140
	150,0	120-150	120-150
	160,0	120-160	120-160
	180,0	120-180	120-180
	200,0	120-200	120-200
	220,0	120-220	120-220
	240,0	120-240	120-240
	260,0	120-260	120-260
	280,0	120-280	120-280
	300,0	120-300	120-300
	32,0	120-320	
	350,0	120-350	
	16	100,0	160-100
120,0		160-120	160-120
140,0		160-140	160-140
160,0		160-160	160-160
180,0		160-180	160-180
200,0		160-200	160-200
220,0		160-220	
240,0		160-240	
260,0		160-260	
280,0		160-280	
300,0		160-300	
320,0		160-320	
350,0	160-350		