



Podkładka płaska

DIN 125A
PN/M-82006
ISO 7089

Materiał: stal, A2, poliamid
Powłoka ochronna: ocynk

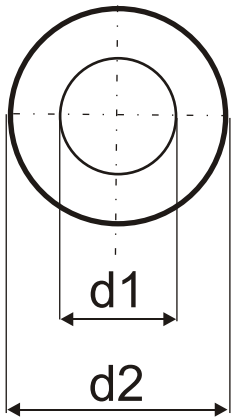

dla gwintu	d1 mm	d2 mm	s mm	stal surowa 012550	stal ocynk. 012552	A2 012520	poliamid 012500
M	1	1,1	3,2	0,3		010	
	2	2,2	5,0	0,3		020	020
	2,5	2,7	6,0	0,5		025	025
	3	3,2	7,0	0,5	030	030	030
	3,5	3,7	8,0	0,5		035	035
	4	4,3	9,0	0,8	040	040	040
	4,5	4,8	12,0	1,0		045	
	5	5,3	10,0	1,0	050	050	050
	6	6,4	12,0	1,6	060	060	060
	7	7,4	14,0	1,6		070	070
	8	8,4	16,0	1,6	080	080	080
	10	10,5	20,0	2,0	100	100	100
	12	13,0	24,0	2,5	120	120	120
	14	15,0	28,0	2,5		140	140
	16	17,0	30,0	3,0	160	160	160
	18	19,0	34,0	3,0		180	180
	20	21,0	37,0	3,0	200	200	200
	22	23,0	39,0	3,0		220	220
24	25,0	44,0	4,0	240	240	240	
27	28,0	50,0	4,0		270	270	
30	31,0	56,0	4,0		300	300	